

Error Exponents in MIMO communications and Matrix Integrals

Giusi Alfano^a
alfano@tu-berlin.de

December 15, 2018

XIV Brunel-Bielefeld Workshop on RMT

^aBased on joint work with C.-F. Chiasserini PoliTO, A. Nordin IEIT CNR



Introduction


Multiantenna Wireless Channel

Multiantenna Wireless Channel

Multiantenna Wireless Channel

Multiantenna Wireless Channel

An instantiation of Multi-input Multi-output Wireless link

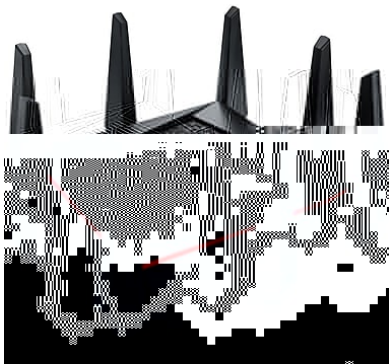



- | The input-output relationship on a multiantenna point-to-point radio channel fed with common transmit signal-to-noise ratio (SNR) ρ , affected by thermal (AWG) Noise can be written as

$$\mathbf{y} = \rho^{-1} \mathbf{H} \mathbf{x} + \mathbf{z}; \quad (1)$$

- | Above, \mathbf{y} is the output vector, i.e. the noisy and filtered version of the transmitted input vector \mathbf{x} . \mathbf{z} represents the AWGN on the receive antenna array, while the generic entry $h_{i,j}$ of the matrix \mathbf{H} denotes the channel gain from the j -th transmit antenna to the i -th receive antenna.

Multiantenna Wireless Channels



.. .. .

.Multiple Inout Multiple Output (MIMO) System.



Mutual Information

A channel like (1) is characterized by an information flow (measured in bit/s) given by the so-called mutual information

$$I(x; y) = h(x) - h(x|y) = h(y) - h(y|x); \quad (2)$$

between the input and the output vectors.

Differential entropy and conditional entropy

In (2),

$$h(x) = E_x[-\log p(x)]; \quad (3)$$

while

$$h(x|y) = E_{(x,y)}[-\log p(x|y)]; \quad (4)$$



Mutual Information with Gaussian Input and Noise



Error-free (i.e. with vanishing error probability) communication can take place at any speed below a characteristic value, depending on the channel structure/statistics, and denoted as **channel capacity** if the

Bounding the Error Probability

The average error probability achievable with maximum likelihood decoding can be bounded as

$$P_e \leq K \exp(-n_b n_c E(p; R; n_c));$$

if the realization of \mathbf{H} stays fixed over n_c channel uses; in this case the input-output relationship over a single code block of length n_b reads as

$$\mathbf{Y} = \mathbf{P}^{-1} \mathbf{H} \mathbf{X} + \mathbf{Z}$$



Error Exponent for MIMO

E



Cuto Rate

$$R_0 = \frac{\log E_c}{n_c} \Big|_{r=0; =1}$$

Channel Capacity

$$C = \lim_{E_c \rightarrow \infty} \frac{R_0}{E_c} = E [I (\cdot)]$$

Considerations

Error exponent(s) evaluation requires on one hand explicit expressions for the input, the output and the transition densities; on the other hand,



Input Density

$$p_{\mathbf{X}}(\mathbf{X}) \propto \exp \left(-\frac{\|\mathbf{X}\|^2}{\sigma^2} \right);$$

with uniform power allocation across transmit antennas.






For a block-fading channel, fed by a Gaussian input with uniform power allocation, the RCEE related to an observation window of n_b independent fading blocks of n_c channel uses each, can be expressed as

$$E_c / \int_0^Z p(\lambda) d\lambda + \int_0^Z \lambda^{n_c} d\lambda ; \quad (11)$$

where $\mathbf{H}^y \mathbf{H} = \mathbf{U} \mathbf{U}^y$.

Let us conclude by making an explicit assumption on .

MIMO multiple-clustered scattering

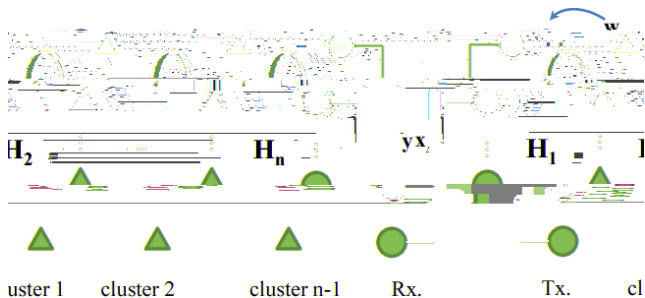



- | Objects of noticeable size or groups of objects can be seen as sources of **dominant** contributions in the **multipath fading** process.
- | The presence of cluster of dominant scatterers inherently assimilates the channel model, to a cascade of systems.
- | The overall impact of multiple-clusters of scatterers is suitably modeled via a product of (independent) Ginibre matrices

$$\mathbf{H} = \mathbf{G}_n \cdots \mathbf{G}_2 \mathbf{G}_1 \quad (12)$$

- | Spatial correlation at either ends of the link and the presence of LOS paths makes the model more involved, though it should be taken into account (not reported here, but spectral properties in presence of correlation have been derived by Kuijlaars-Stivigny (2014) and Wei (2015)).

Error Exponent with Multiple Scattering



For a block-fading channel with progressive scattering, the RCEE is given by (6) where

$$E / Z \frac{(1 - pr)(1 +)}{p} ; \quad (13)$$



- | Error Exponents expressions depend on coding scheme, and channel state availability;
- | If the receiver is not informed, $p(Y|X)$ appears (and it is not Gaussian in general);
- | For H non unitarily invariant, the expression is more involved;
- | A more general expression of EE corresponding to a **realistic** channel dynamic is to be provided.
- | 10.1109/TIT.2018.2803046



Thank you!